
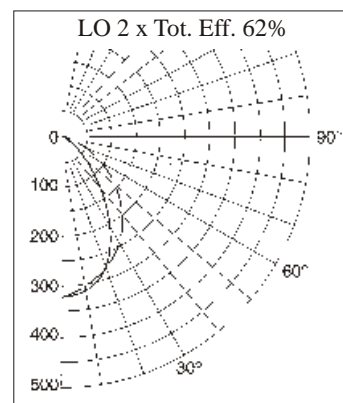


Manarf-Lux

oprawy o wietleniowe
luminaires manufacture

oprawy do sufitów podwieszanych o strukturze modułowej (600x600) fitting recessed for modular ceilings

ALFA LO 2 X 18 W - 36 W - 58 W

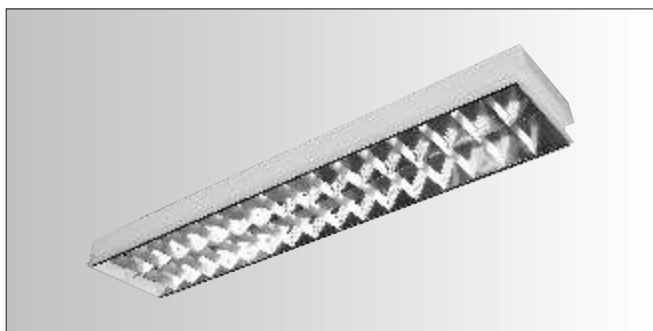

OPRAWA DO SUFITÓW PODWIESZANYCH O STRUKTURZE MODUŁOWEJ (600X600)

Korpus: z blachy stalowej, malowany farbami proszkowymi w kolorze białym.

Dyfuzor: Raster wykonany z aluminium o wysokim połysku, odbły niki w kształcie litery V, poprzeczki proste z aluminium ryflowanego.

Okablowanie: Zasilanie 230V/50Hz, kondensator kompensuj cy.

Normatywy: Produkt wykonany zgodnie z norm : PN-EN 60598-CEI-34-21, stopie zabezpieczenia zgodnie z norm EN 60529.




FITTING RECESSED FOR MODULAR CEILINGS

Body: in pressed steel, powder coated, white colour.

Diffuser: Very pure aluminium reflector with optical, lamellar, transverse striped screens.

Electric gear: 230V/50Hz , condenser for ballast.

Regulations: Manufactured in compliance with PN-EN 60598-CEI-34-21 standards.
The level of protection complies with the EN 60529 standard.

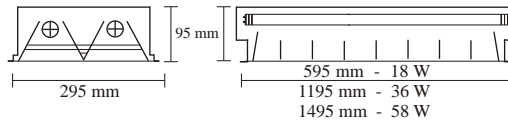

LUMINAIRES

SELECTION TABLES

LO 2 X 18 W

LO 2 X 36 W

LO 2 X 58 W

Type of light sources				
Luminous flux				
Height 3 m. - 0.80 m.				
Average light intensity				
Area [m ²]				
60				
80				
100				
200				

standard lamp		three phospor lamp	
1150 lm		1350 lm	
300 lux	500 lux	300 lux	500 lux
No. of luminaires		No. of luminaires	
16,6	27,7	14,2	23,6
22,2	36,9	18,9	31,5
27,7	46,2	23,6	39,3
50,7	84,5	43,2	71,9

standard lamp		three phospor lamp	
2700 lm		3350 lm	
300 lux	500 lux	300 lux	500 lux
No. of luminaires		No. of luminaires	
7,1	11,8	5,7	9,5
9,4	15,7	7,6	12,7
11,8	19,7	9,5	15,8
27,0	45,0	23,0	38,0

standard lamp		three phospor lamp	
4150 lm		5200 lm	
300 lux	500 lux	300 lux	500 lux
No. of luminaires		No. of luminaires	
4,6	7,7	3,7	6,1
6,1	10,2	4,9	8,2
7,7	12,8	6,1	10,2
23,0	39,0	19,0	31,0