

Manarf-Lux

oprawy o wietleniowe
luminaires manufacture

oprawy nastropowe ceiling lights

BETA PRIMA CO 1 X 18 W - 36 W - 58 W



OPRAWA NASTROPOWA

Korpus: z blachy stalowej o kraw. dziach profilowanych, malowany farbami proszkowymi w kolorze białym.

Dyfuzor: Płyta mleczna akrylowa.

Okablowanie: Zasilanie 230V/50Hz, kondensator kompensuj. cy.

Normatywy: Produkt wykonany zgodnie z norm : PN-EN 60598-CEI-34-21, stopie zabezpieczenia zgodnie z norm EN 60529.


CEILING LIGHTS

Body: in pressed steel, powder coated, white colour.

Diffuser: Opal, metacrylate sheet.

Electric gear: 230V/50Hz , condenser for ballast.

Regulations: Manufactured in compliance with PN-EN 60598-CEI-34-21 standards.
The level of protection complies with the EN 60529 standard.

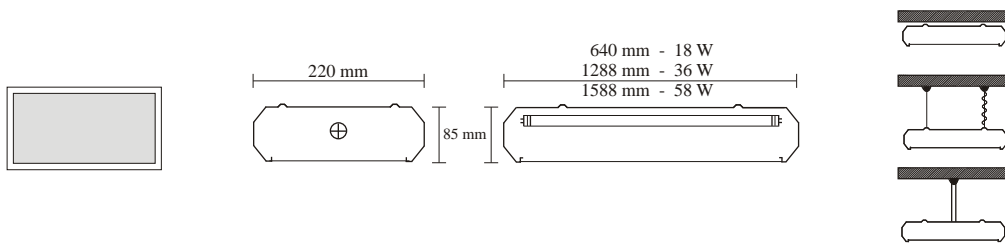

LUMINAIRES

SELECTION TABLES

CO 1 X 18 W

CO 1 X 36 W

CO 1 X 58 W

Type of light sources	standard lamp		three phospor lamp		standard lamp	three phospor lamp		standard lamp	three phospor lamp			
	1150 lm		1350 lm			2700 lm			3350 lm		4150 lm	
Luminous flux												
Height 3 m. - 0,80 m.												
Average light intensity	300 lux	500 lux	300 lux	500 lux	300 lux	500 lux	300 lux	500 lux	300 lux	500 lux	300 lux	500 lux
Area [m ²]	No. of luminaires		No. of luminaires		No. of luminaires		No. of luminaires		No. of luminaires		No. of luminaires	
60	38,0	63,4	32,4	54,0	16,2	27,0	13,1	21,8	10,5	17,6	8,4	14,0
80	50,7	84,5	43,2	72,0	21,6	36,0	17,4	29,0	14,1	23,4	11,2	18,7
100	63,4	105,7	54,0	90,0	27,0	45,0	21,8	36,3	17,6	29,3	14,0	23,4
200	116,0	193,4	98,9	164,8	27,0	45,0	23,0	38,0	23,0	39,0	19,0	31,0