


Manarf-Lux

oprawy o wietleniowe
luminaires manufacture

oprawy nastropowe ceiling lights

BETA PRIMA CP 1 X 18 W - 36 W - 58 W

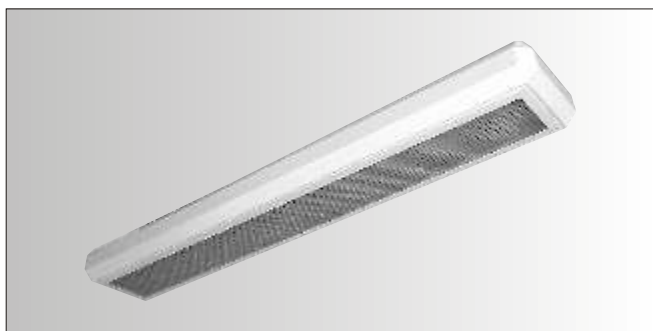

OPRAWA NASTROPOWA

Korpus: z blachy stalowej o kraw. dziach profilowanych, malowany farbami proszkowymi w kolorze białym.

Dyfuzor: Płyta pryzmatyczna akrylowa.

Okablowanie: Zasilanie 230V/50Hz, kondensator kompensuj. cy.

Normatywy: Produkt wykonany zgodnie z norm : PN-EN 60598-CEI-34-21, stopie zabezpieczenia zgodnie z norm EN 60529.


CEILING LIGHTS

Body: in pressed steel, powder coated, white colour.

Diffuser: Prismatic, metacrylate sheet.

Electric gear: 230V/50Hz , condenser for ballast.

Regulations: Manufactured in compliance with PN-EN 60598-CEI-34-21 standards.
The level of protection complies with the EN 60529 standard.

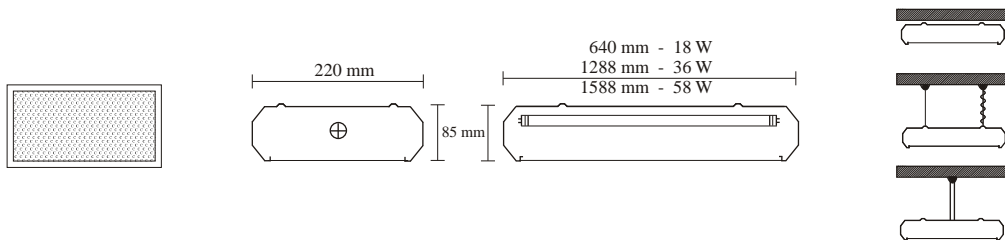

LUMINAIRES

SELECTION TABLES

Type of light sources	CP 1 X 18 W				CP 1 X 36 W				CP 1 X 58 W			
	standard lamp		three phospor lamp		standard lamp		three phospor lamp		standard lamp		three phospor lamp	
Luminous flux	1150 lm		1350 lm		2700 lm		3350 lm		4150 lm		5200 lm	
Height 3 m. - 0,80 m.												
Average light intensity	300 lux	500 lux	300 lux	500 lux	300 lux	500 lux	300 lux	500 lux	300 lux	500 lux	300 lux	500 lux
Area [m ²]	No. of luminaires		No. of luminaires		No. of luminaires		No. of luminaires		No. of luminaires		No. of luminaires	
60	35,6	59,4	30,4	50,6	15,2	25,3	12,2	20,4	9,9	16,5	7,9	13,1
80	47,5	79,2	40,5	67,5	20,2	33,7	16,3	27,2	13,2	21,9	10,5	17,5
100	59,4	99,0	50,6	84,3	25,3	42,2	20,4	34,0	16,5	27,4	13,1	21,9
200	108,7	181,2	92,6	154,3	27,0	45,0	23,0	38,0	23,0	39,0	19,0	31,0