Manarf-Lux
oprawy oświetleniowe
luminaires manufacture

oprawy nastropowe
ceiling lights

BETA PRIMA LB 2 X 18 W - 36 W - 58 W

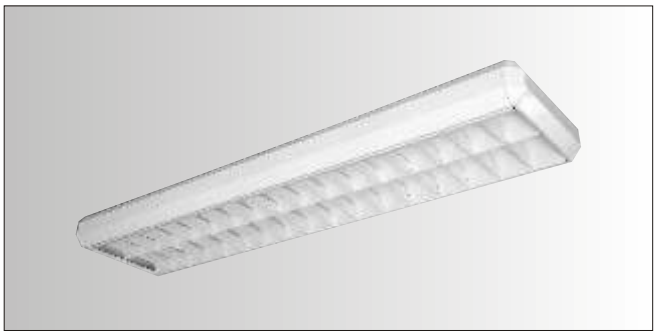

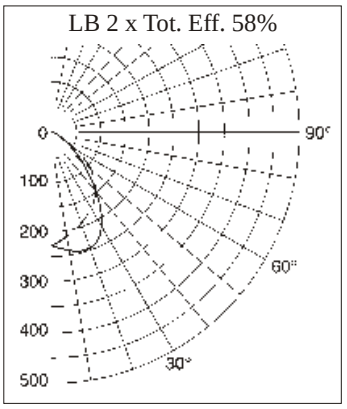

OPRAWA NASTROPOWA

Korpus: z blachy stalowej o krawędziach profilowanych, malowany farbami proszkowymi w kolorze białym.
Dyfuzor: Raster wykonany z aluminium malowanego na biało. Odbłyśniki w kształcie litery V, poprzeczki proste.
Okablowanie: Zasilanie 230V/50Hz, kondensator kompensujący.
Normatywy: Produkt wykonany zgodnie z normą: PN-EN 60598-CEI-34-21, stopień zabezpieczenia zgodnie z normą EN 60529.

CEILING LIGHTS

Body: in pressed steel, powder coated, white colour.
Diffuser: White reflector with lamellar, transverse screens.
Electric gear: 230V/50Hz , condenser for ballast.
Regulations: Manufactured in compliance with PN-EN 60598-CEI-34-21 standards. The level of protection complies with the EN 60529 standard.



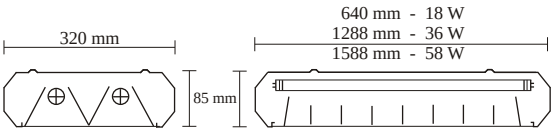



LUMINAIRES

SELECTION TABLES

	LB 2 X 18 W				**LB 2 X 36 W**				**LB 2 X 58 W**			
Type of light sources	standard lamp		three phospor lamp		standard lamp		three phospor lamp		standard lamp		three phospor lamp	
Luminous flux	1150 lm		1350 lm		2700 lm		3350 lm		4150 lm		5200 lm	
Height 3 m. - 0,80 m.												
Average light intensity	300 lux	500 lux	300 lux	500 lux	300 lux	500 lux	300 lux	500 lux	300 lux	500 lux	300 lux	500 lux
Area [m2]	No. of luminires		No. of luminires		No. of luminires		No. of luminires		No. of luminires		No. of luminires	
60	17,1	28,5	14,6	24,3	7,3	12,1	5,9	9,8	4,7	7,9	3,8	6,3
80	22,8	38,0	19,4	32,4	9,7	16,2	7,8	13,0	6,3	10,5	5,0	8,4
100	28,5	47,5	24,3	40,5	12,1	20,2	9,8	16,3	7,9	13,2	6,3	10,5
200	52,1	86,9	44,4	74,0	27,0	45,0	23,0	38,0	23,0	39,0	19,0	31,0

© Copyright Manarf-Lux 2005

www.manarf-lux.com ♦ tel: 48 046 8314008 ♦ fax: 48 046 8314471