
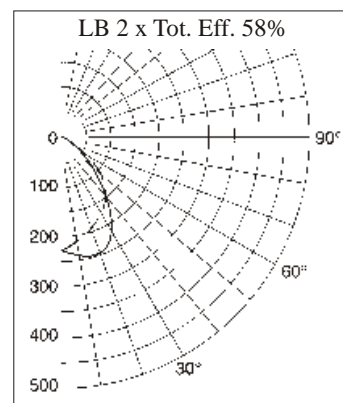


Manarf-Lux

oprawy o wietleniowe
luminaires manufacture

oprawy do sufitów
podwieszanych
gipsowo-kartonowych
fitting recessed
for plasterboard ceilings

GAMMA LB 2 X 18 W - 36 W - 58 W

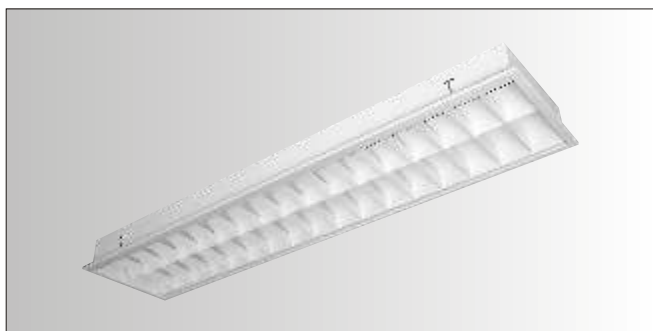

OPRAWA DO SUFITOW PODWIESZANYCH KARTONOWO-GIPSOWYCH

Korpus: z blachy stalowej, malowany farbami proszkowymi w kolorze białym.

Dyfuzor: Raster wykonany z aluminium malowanego na biało.

Odblę niki w kształcie litery V, poprzeczki proste.

Okablowanie: Zasilanie 230V/50Hz, kondensator kompensujący.

Normatywy: Produkt wykonany zgodnie z norm : PN-EN 60598-CEI-34-21,
stopień zabezpieczenia zgodnie z norm EN 60529.




RECESSED CEILING LIGHTS FOR PLASTERBOARD CEILING

Body: in pressed steel, powder coated, white colour.

Diffuser: White reflector with lamellar, transverse screens.

Electric gear: 230V/50Hz, condenser for ballast.

Regulations: Manufactured in compliance with PN-EN 60598-CEI-34-21 standards.
The level of protection complies with the EN 60529 standard.

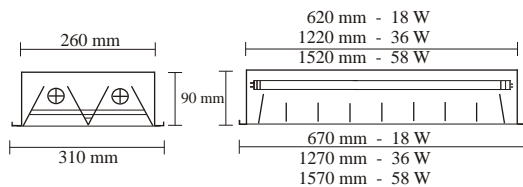

265 x 625 mm - 18 W
 265 x 1225 mm - 36 W
 265 x 1525 mm - 58 W

LUMINAIRES

SELECTION TABLES

Type of light sources
Luminous flux
Height 3 m. - 0.80 m.
Average light intensity
Area [m ²]
60
80
100
200

LB 2 X 18 W

standard lamp		three phospor lamp	
1150 lm		1350 lm	
300 lux	500 lux	300 lux	500 lux
No. of luminaires		No. of luminaires	
17,1	28,5	14,6	24,3
22,8	38,0	19,4	32,4
28,5	47,5	24,3	40,5
52,1	86,9	44,4	74,0

LB 2 X 36 W

standard lamp		three phospor lamp	
2700 lm		3350 lm	
300 lux	500 lux	300 lux	500 lux
No. of luminaires		No. of luminaires	
7,3	12,1	5,9	9,8
9,7	16,2	7,8	13,0
12,1	20,2	9,8	16,3
27,0	45,0	23,0	38,0

LB 2 X 58 W

standard lamp		three phospor lamp	
4150 lm		5200 lm	
300 lux	500 lux	300 lux	500 lux
No. of luminaires		No. of luminaires	
4,7	7,9	3,8	6,3
6,3	10,5	5,0	8,4
7,9	13,2	6,3	10,5
23,0	39,0	19,0	31,0