


Manarf-Lux

oprawy o wietleniowe
luminaires manufacture

oprawy do sufitów
podwieszanych
gipsowo-kartonowych
fitting recessed
for plasterboard ceilings

GAMMA LB 4 X 18 W - 36 W

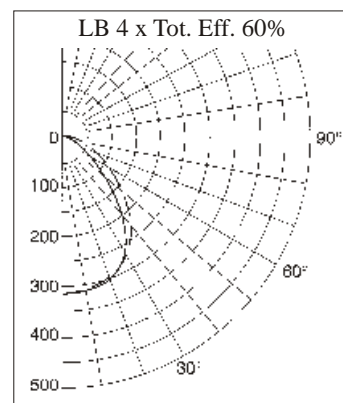


OPRAWA DO SUFITOW PODWIESZANYCH KARTONOWO-GIPSOWYCH

- Korpus: z blachy stalowej, malowany farbami proszkowymi w kolorze białym.
Dyfuzor: Raster wykonany z aluminium malowanego na biało.
Odbły niki w kształcie litery V, poprzeczki proste.
Okablowanie: Zasilanie 230V/50Hz, kondensator kompensujący.
Normatywy: Produkt wykonany zgodnie z norm : PN-EN 60598-CEI-34-21,
stopie zabezpieczenia zgodnie z norm EN 60529.

RECESSED CEILING LIGHTS FOR PLASTERBOARD CEILING

- Body: in pressed steel, powder coated, white colour.
Diffuser: White reflector with lamellar, transverse screens.
Electric gear: 230V/50Hz, condenser for ballast.
Regulations: Manufactured in compliance with PN-EN 60598-CEI-34-21 standards.
The level of protection complies with the EN 60529 standard.

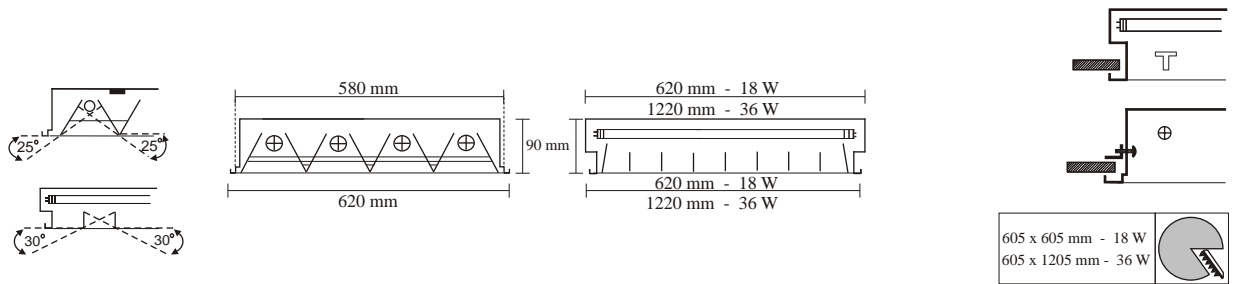

LUMINAIRES SELECTION TABLES

LB 4 X 18 W

Type of light sources	standard lamp		three phospor lamp	
Luminous flux	1150 lm		1350 lm	
Height 3 m. - 0.80 m.				
Average light intensity	300 lux	500 lux	300 lux	500 lux
Area [m ²]	No. of luminaires		No. of luminaires	
60	8,4	14,0	7,2	12,0
80	11,2	18,7	9,6	16,0
100	14,0	23,4	12,0	19,9
200	25,7	42,8	21,9	36,5

LB 4 X 36 W

Type of light sources	standard lamp		three phospor lamp	
Luminous flux	2700 lm		3350 lm	
Height 3 m. - 0.80 m.				
Average light intensity	300 lux	500 lux	300 lux	500 lux
Area [m ²]	No. of luminaires		No. of luminaires	
60	3,6	6,0	2,9	4,8
80	4,8	8,0	3,9	6,4
100	6,0	10,0	4,8	8,0
200	10,9	18,2	8,8	14,7