
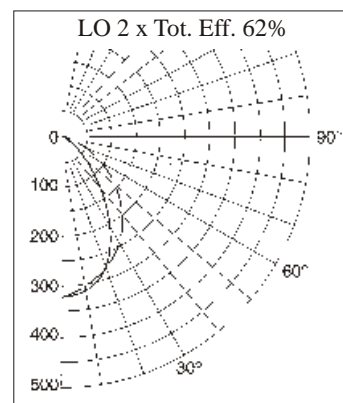


Manarf-Lux

oprawy oświetleniowe
luminaires manufacture

oprawy do sufitów podwieszanych gipsowo-kartonowych fitting recessed for plasterboard ceilings

GAMMA LO 2 X 18 W - 36 W - 58 W



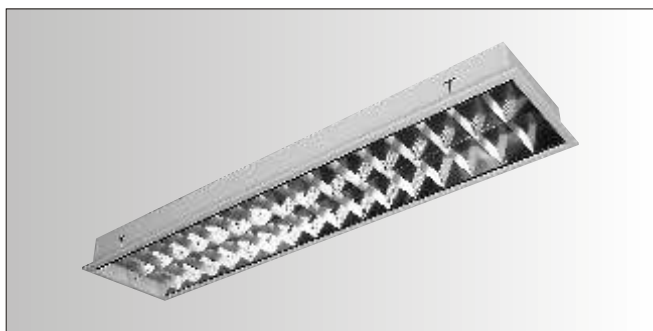


OPRAWA DO SUFITÓW PODWIESZANYCH KARTONOWO-GIPSOWYCH

- Korpus: z blachy stalowej, malowany farbami proszkowymi w kolorze białym.
Dyfuzor: Raster wykonany z aluminium o wysokim połysku, odbły niki w kształcie litery V, poprzeczki proste z aluminium ryflowanego.
Okablowanie: Zasilanie 230V/50Hz, kondensator kompensujący.
Normatywy: Produkt wykonany zgodnie z norm : PN-EN 60598-CEI-34-21, stopie zabezpieczenia zgodnie z norm EN 60529.

RECESSED CEILING LIGHTS FOR PLASTERBOARD CEILING

- Body: in pressed steel, powder coated, white colour.
Diffuser: Very pure aluminium reflector with optical, lamellar, transverse striped screens.
Electric gear: 230V/50Hz, condenser for ballast.
Regulations: Manufactured in compliance with PN-EN 60598-CEI-34-21 standards. The level of protection complies with the EN 60529 standard.

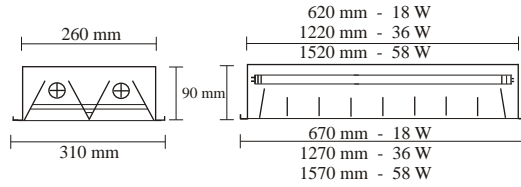

265 x 625 mm - 18 W
 265 x 1225 mm - 36 W
 265 x 1525 mm - 58 W

LUMINAIRES

SELECTION TABLES

Type of light sources
Luminous flux
Height 3 m. - 0,80 m.
Average light intensity
Area [m ²]
60
80
100
200

LO 2 X 18 W

standard lamp		three phospor lamp	
1150 lm		1350 lm	
300 lux	500 lux	300 lux	500 lux
No. of luminaires		No. of luminaires	
16,6	27,7	14,2	23,6
22,2	36,9	18,9	31,5
27,7	46,2	23,6	39,3
50,7	84,5	43,2	71,9

LO 2 X 36 W

standard lamp		three phospor lamp	
2700 lm		3350 lm	
300 lux	500 lux	300 lux	500 lux
No. of luminaires		No. of luminaires	
7,1	11,8	5,7	9,5
9,4	15,7	7,6	12,7
11,8	19,7	9,5	15,8
27,0	45,0	23,0	38,0

LO 2 X 58 W

standard lamp		three phospor lamp	
4150 lm		5200 lm	
300 lux	500 lux	300 lux	500 lux
No. of luminaires		No. of luminaires	
4,6	7,7	3,7	6,1
6,1	10,2	4,9	8,2
7,7	12,8	6,1	10,2
23,0	39,0	19,0	31,0